


Foglio metallic (Metallic Sheet)

Construction:

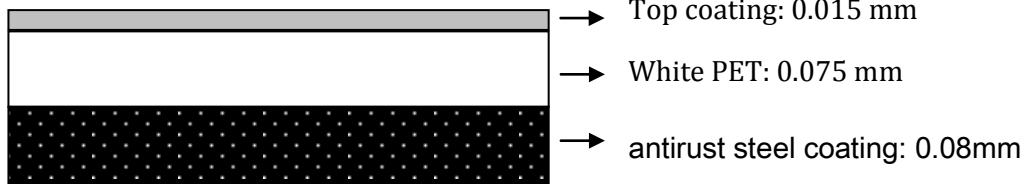

Applications & Storage:

- Print Way: UV and Latex digital print
- Working Condition: Temperature range is from -5°C to 40°C, and relative humidity range is from 10% to 80%. Posted graphic's daily range of temperature is within 20°C, relative humidity is within 30%
- Storage Condition: Closed preserve avoiding sunlight in normal temperature, temperature range is from 10°C to 35°C, and relative humidity range is from 10% to 80%
- Guarantee Period: 12 months under storage condition
- User Guide: Do not use this material for extra-large size graphic such as 3M long or more, which is advised to use high-force material instead. To use small piece of self-adhesive fixed on some important location, such as the location of the joints and corner etc.
- Others: waterproof, without flame-resistant, antirust

Standard Size:

Length : 30M, 50M

Width : 914mm, 1070mm, 1270mm, 1370mm, 1524mm, 1626mm

Physical data:

Thickness (mm)	Wight (g/Mq)	Whiteness (Wb)	Brightness (Gs)	Tensile Strength (MPa)		Breaking Elongation Ratio (%)	
0.17 ^{±0.02}	320 ^{±20}	【85, 90】	【3, 5】	【60, 75】	【50, 60】	【30, 45】	【50, 70】

Magnetic Data:

Lifting Weight : ≥ 3.5 (g/cm²)

Condition: the standard test tool is isotropic rubber magnet 0.7mm (Holding Strength is about 40g/cm²), test equipment is Tensile Strength Tester.

Le informazioni pubblicate riguardanti i nostri prodotti sono basate su conoscenze ed esperienze pratiche. Gli acquirenti devono indipendentemente determinare, prima dell'uso, l'idoneità del materiale per l'utilizzo che ne vogliono fare. L'acquirente deve assumersi tutti i rischi per qualsiasi uso, funzionamento e applicazione del materiale. Noi siamo responsabili del danno solo per il prezzo d'acquisto con esclusione di danni diretti o accidentali. Tutte le informazioni fornite servono solo a descrivere il prodotto e non riguardano assicurazioni in senso giuridico. Le specifiche sono soggette a modifiche senza preavviso, salvo errori ed omissioni.